

Features

- Constant voltage output
- Built-in active PFC function
- Supports Triac dimming; dimming depth $\leq 1\%$
- Flicker free
- High efficiency (typical value $\geq 88\%$)
- All-round protections: over voltage protection, over load protection, short circuit protection and over temperature protection
- IP20
- 5-year warranty (please refer to the warranty condition)



Applications


· Horticultural lighting · indoor office lighting · decorative lighting · commercial lighting · residential lighting

Descriptions

LF-GAT150-6250-24 is a 150W constant voltage flicker-free Triac dimmable LED driver with 0-100% dimming range. It is compatible with leading and trailing edge dimmers. Its rated input voltage ranges from 198 to 253Vac; output voltage: 24Vdc and maximum output current: 6.25A. It has high efficiency and low THD. It is suitable for indoor constant voltage LED strip, etc.

Product Model

LF - GAT 150 - 6250 - 24

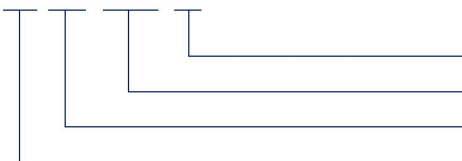

- 24: output voltage: 24V
- 6250: maximum output current: 6250mA
- 150: maximum output power: 150W
- GAT: CV Triac LED driver

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.
 Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

■ Electrical Characteristics

Model		LF-GAT150-6250-24				
Output	Output Current	6250mA max.				
	Output Voltage	DC 24V				
	Output Power	150W max.				
	Flicker Index	IEC-Pst ≤ 1 , CIE SVM ≤ 0.9 , modulation depth $\leq 0.1\%$ Complies with flicker-free standard (IEEE Std 1789-2015)				
	Voltage Tolerance	$24V \pm 2.5\%$				
	Temperature Drift	$\pm 10\%$				
Input	Input Voltage	220-240Vac (voltage limit: 198-253Vac)				
	DC Input Voltage	176-280Vdc				
	Input Frequency	47-63Hz				
	Input Current	1.2A max.				
	THD	$\leq 10\%$ @230Vac full load				
	PF	≥ 0.95 @230Vac full load				
	Efficiency	$\geq 88\%$ @230Vac@24V full load				
	Inrush Current	$\leq 70A$ & $600\mu S$ @230Vac				
	Loading Quantities of Circuit Breaker	Model	B10	C10	B16	C16
		Quantity (pcs)	5	5	8	8
Leakage Current	$< 0.5mA$					
Protections	Surge	L-N: 1kV				
	Open Circuit	Open-circuit voltage $\leq 30Vdc$				
	Short Circuit	Hiccup mode (auto-recovery)				
Environment Descriptions	Operating Temperature	$-20^{\circ}C \sim +45^{\circ}C$				
	Operating Humidity	20-90%RH (without condensation)				
	Storage Temperature/ Humidity	$-30^{\circ}C \sim +60^{\circ}C$ (6 months in Class I environment); 10-95%RH (without condensation)				
	Atmospheric Pressure	86-106kPa				

■ Electrical Characteristics

Safety and EMC	Certifications	TUV-ENEC, CE, CB, RCM, CCC
	Withstanding Voltage	I/P-O/P: 3.75kVac, <5mA, 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1: 2015, EN61347-2-13: 2014/A1: 2017, EN62384 2016/A1: 2009 CE-LVD: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015 SAA: AS61347.2-13: 2018 CB: IEC61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 CCC: GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5, 6, 11 CCC: GB/T17626.2, 3, 4, 5, 6, 11
	ESD	Air 8kV, touch 4kV (Class B)
Other Parameters	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 years (Tc ≤84°C)
Testing Equipment	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B; Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: TH9201B, flicker tester (flicker-free coefficient test) 60N-01, etc.	
Testing Remarks	The above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac without any special remarks.	

■ **Electrical Characteristics**


Additional Remarks	<p>1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.</p> <p>2. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.</p> <p>3. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.</p>
---------------------------	--

■ **Recommended Dimmers Matching LF-GAT150-6250-24**


Leading edge	SIEMENS: 57C8-256	Legrand: 58325671325/40-500W	VARIL1 GHT: HQ3W	BULL: G07D101D	CHNT: NEW	HDL SYSTEM: MD0602.432
Trailing edge	GIRA:030700		Schneider: ALT400905		LUTRON SYSTEM: LQSE-4A-D	

■ **Product Characteristic Curves**


PF Curve

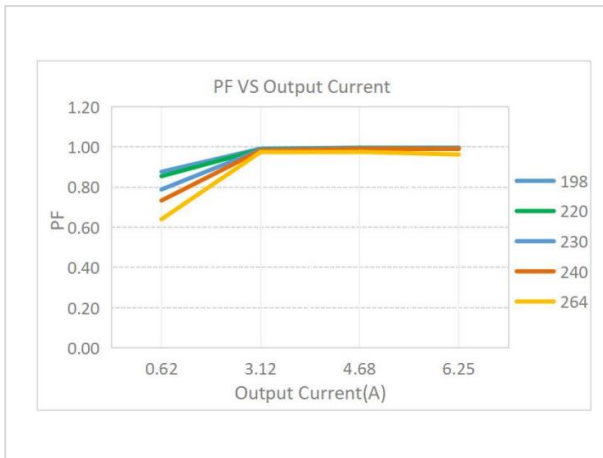

Efficiency Curve

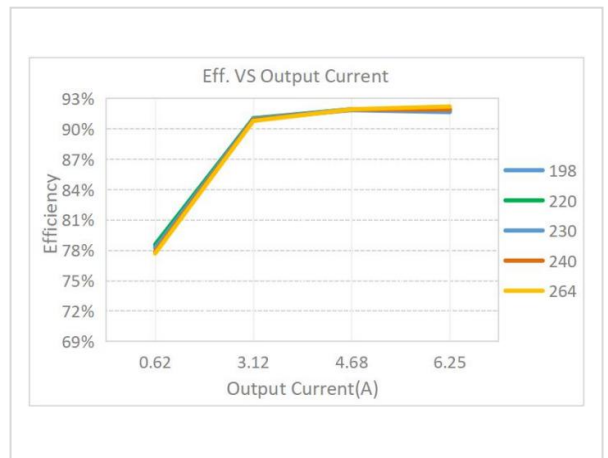


Triac Dimming Curves

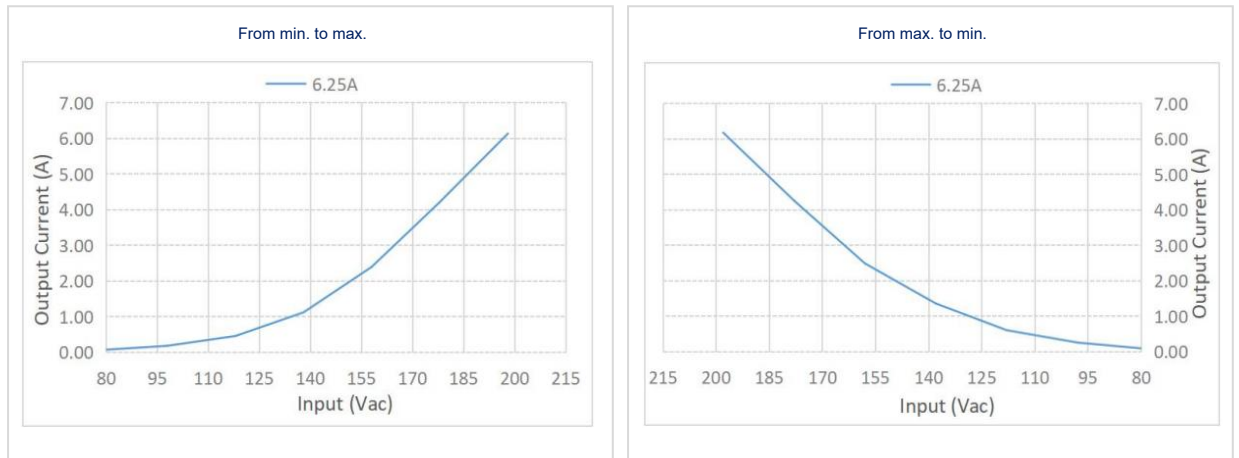

Input: 230Vac, output: 24Vdc/6250mA (this data is measured by Lifud Triac dimmer and the chart is for reference only)

Lifetime Curve

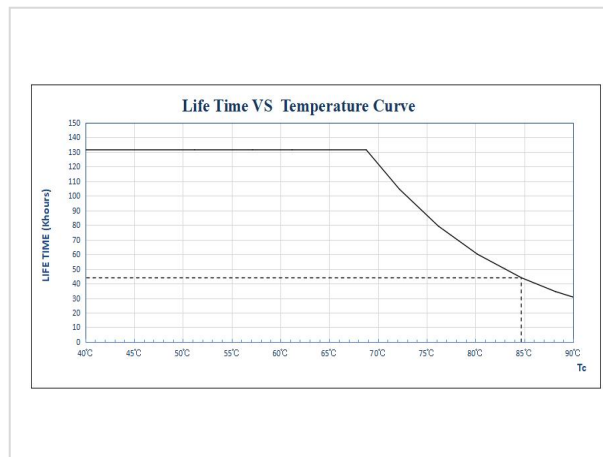


Dimming Operation Instructions

Product terminals

INPUT	
AC-L	Input terminal of AC live wire
AC-N	Input terminal of AC neutral wire


OUTPUT	
LED+	Positive electrode output of LED driver
LED-	Negative electrode output of LED driver

Wiring Diagram of Triac Dimming Operation

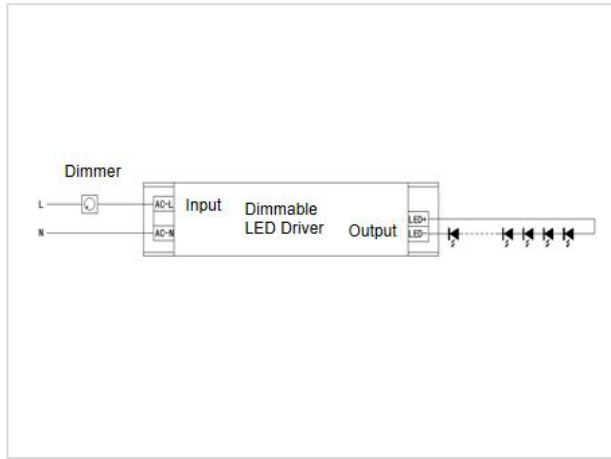

■ Structure & Dimensions (unit: mm)

Model	Overall Appearance (L*W*H)	Distance Between 2 Positioning Holes	Diameter of Positioning Hole
LF-GAT150-6250-24	360.8*42*30.3 mm (±0.5 mm)	316.2±0.2mm/25.5mm	3.6*5.1mm

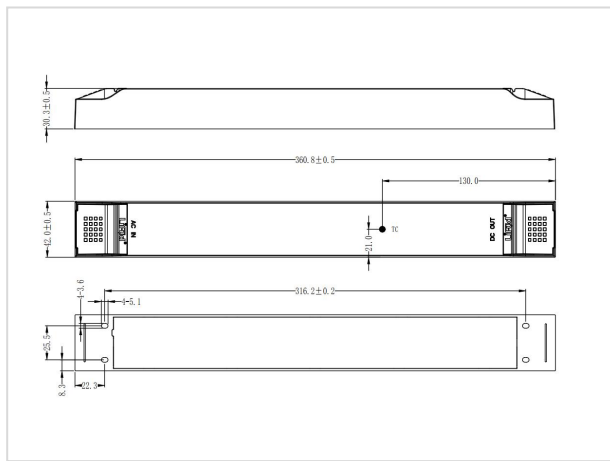

■ **Packaging Specifications**

Model	LF-GAT150-6250-24
Carton Size	385*285*210 mm (L*W*H)
Quantity	6 pcs/layer; 5 layers/ctn; 30 pcs/ctn
Weight	0.49 kg/pc; 14.8 kg/ctn

■ **Transportation and Storage**

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.