

Constant Current Driver
Model: LC60W200-350



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
LC60W200-350	200mA	0.17A	38W	10.0-34.0W	0.95	90%	50-170V	250V
	250mA	0.21A	47W	12.5-42.5W	0.96	91%		
	300mA	0.25A	56W	15.0-51.0W	0.97	92%		
	350mA	0.29A	64W	17.5-59.5W	0.98	93%		

*** Test result @230V, 50Hz, Full Load.**

1.Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Non-isolation
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240V
	Range of AC Input Voltage	198-264VAC
	Range of DC Input Voltage	176-280VDC
	Frequency	0/50-60Hz
	Power Factor	≥0.98(230VAC, full Load, see graphs)
	THD	≤20%(230VAC, full Load, see graphs)
	No-load Power Consumption	≤0.5W @230VAC
Output	Current Accuracy	±5%
	Max. Output Voltage	250V
	Started Delay Time	≤0.5S(230VAC, full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin) / (Imax+Imin)
	PstLM	≤1
	SVM	≤0.4
	Emergency output coefficient	1
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery



LC60W200-350

	No-load Protection	Auto Recovery
	Insulation voltage	O/P to PE , 1.5KVac/1min I/P to PE , 1.5KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 700μA
Environment	Ta/Operation Temperature	-20...+55℃
	Ts/Storage Temperature	-30....+85℃
	Tc/Enclosure Temperature	75℃
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Build-in
	PRI Wire preparation	0.5-1.5□
	SEC Wire preparation	0.5-1.5□
	Dimension	165*30*21mm (L*W*H)
Standards	Certification	CE、EAC
	Safety Standards	EN61347-1:2015 EN61347-2-13:2014/A1:2017 EN62384:2006/A1:2009 EN62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1
	EMC Standards	EN IEC 55015:2019 EN61547:2009 EN IEC 61000-3-2:2019 EN 61000-3-3:2013/A1:2019
	Performance	EN62384
	Surge	L-N:1KV; L/N-PE:2KV;
Others	RoHS	Complied to 2011/65/EU
	Life Time	50000h
<p>Remark:</p> <p>1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature.</p> <p>2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.</p>		

2. Output Current Setting

Output Current	Dial 1	Dial 2
350mA	ON	ON
300mA	OFF	ON
250mA	ON	OFF
200mA	OFF	OFF




LC60W200-350

3.Connected quantities of different current Breaker

TYPE	LC60W200-350 Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B		15	20	24	30	38	@230VAC	40	160us
TYPE C		24	31	38	48	60			
TYPE D		38	50	61	77	96			


4.Label




COMPONENTS
LC60W200-350
Constant Current Type

PIN1	PIN2	I _{rated} [mA]	P _{rated} [W]	U _{rated} [V]	U _N /f _N	I _N [A]	t _a [°C]	λ
OFF	OFF	200	34.0	50-170	220-240V 0/50-60Hz	0.17	-20...+55	0.95
ON	OFF	250	42.5			0.21		0.96
OFF	ON	300	51.0			0.25		0.97
ON	ON	350	59.5			0.29		0.98

● tc=75°C








Output




wire preparation
8mm wire 0.5-1.5


LED DRIVER•For LED modules only U_{out} : Max.250VDC
 Made in China•KGP Electronics GmbH

5.Lifetime curve

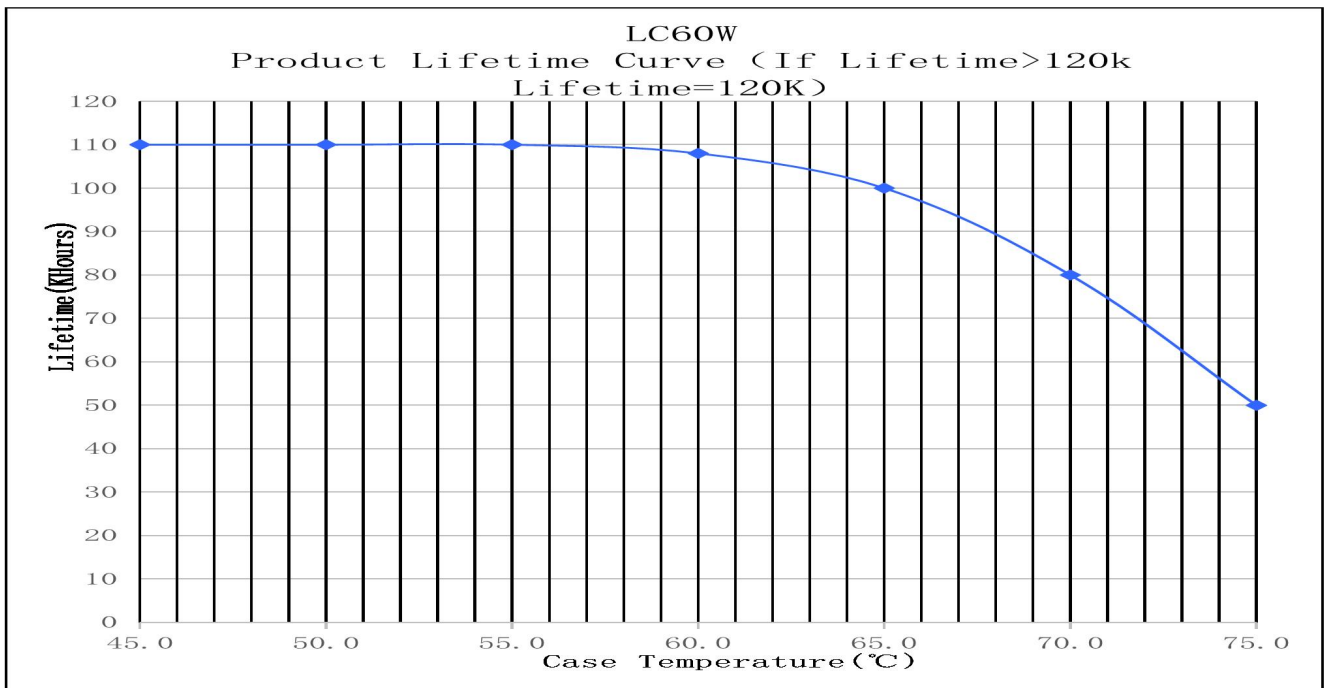


6.Dimension (Unit: mm)

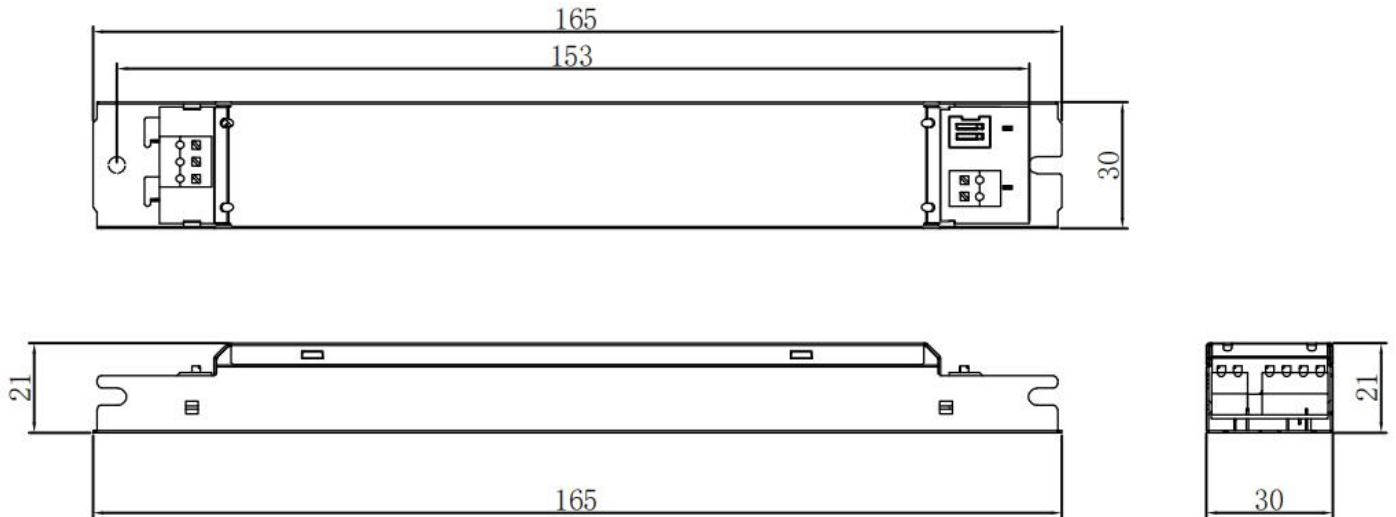

7.Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
410*270*160MM	110PCS	T.B.D	T.B.D	T.B.D

8.Wiring Diagram

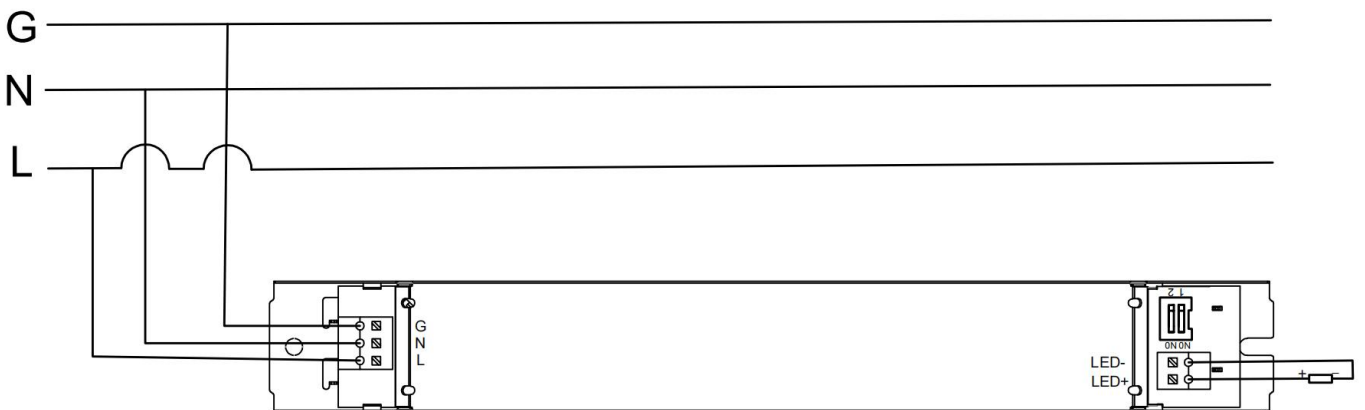



LC60W200-350

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.

10. REVISION HISTORY

DATE	REV.	REMARK
2023-6-1	V1.0	Initial release.